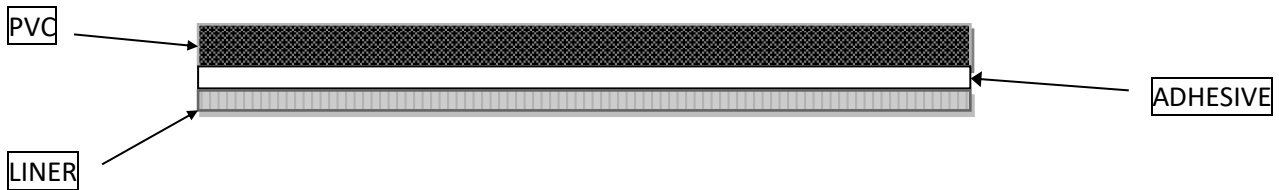


STRUCTURAL DRAWING OF ANTI-SKID TAPE**ANTI-SKID TAPE TECHNICAL DATA SHEET**

1. BACK CARRIED (70%-75%)	0.65 mm $\pm$ 0.03 mm PVC
2. TYPE OF ADHESIVE (5%-10%)	ACRYLIC SOLVENT
3. LINER MATERIAL (15%-20%)	ART PAPER
4. OVERALL THICKNESS	0.82 mm $\pm$ 0.2 m
5. THICKNESS OF ADHESIVE	0.07 mm $\pm$ 0.01 mm
6. THICKNESS OF LINER	0.17 mm $\pm$ 0.01 mm
7. ADHESION TO STEEL	1.2 kg/ins
8. TENSILE	15 kg/ins
9. ELONGATION AT BREAK	150%
10. APPLICATION TEMPERATURE RANGE	- 10° C to + 40° C
11. RESISTANCE TO WATER	GOOD The tape must be left between 12-24hrs before it is put into contact with water
12. RESISTANCE TO SOLVENT	POOR
13. PRIME COMPOSITION	PVC - PLASTICIZER